

ProLine SV SIP

ClassicLine SV SIP

SmartView SIP

About Robin Telecom Development

- Established in 2009, based out of Alkmaar/Netherlands
- Manufacturer of high-end analog- and SIP video door intercoms
- In-house hardware/software development and production facility
- Product portfolio concentrates around integration of Video Surveillance, Access Control and IP Telephony.



Contents

- SmartView SIP
- ProLine SV SIP
- ClassicLine SV SIP
- Features
- Deployment Options
- Datasheet
- Documentation
- Support
- Where to buy

SmartView SIP

- SmartView SIP, 1 piezo call button
- Form factor : 110 (w) x 180 (h)
- 5MP IP camera
- HD 720p, 130° viewing angle



C01110



C01100

C02050

ProLine SV SIP (5MP IP camera)

- ProLine SV SIP (5MP IP camera)
- 1, 2, 4 call buttons (piezo) or integrated Keypad, Incl LED backlight
- HD 720p, 130° viewing angle
- Form factor: 110 (w) x 257 (h)




C03050



C03052



C03054

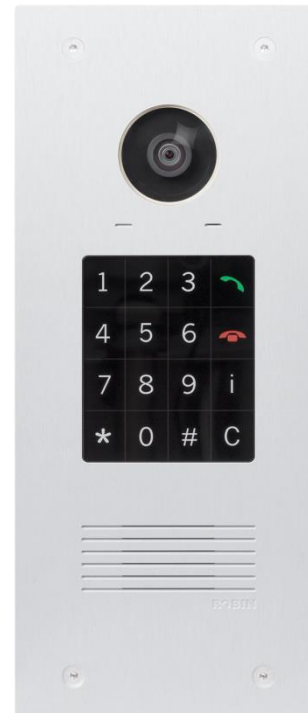

C03058



C03001



C01112

ClassicLine SV SIP (5MP IP camera)

- ClassicLine SV SIP (5MP IP camera)
- Frontpanel: Brass, 3mm brushed
- 1, 2, 4 call buttons (piezo)
- HD 720p, 130-degree viewing angle
- Incl LED backlight
- Form factor: 110 (w) x 257 (h)



C03071



C03072



C03074



C03071

Flush-mount box



C01112

Features

- 5 Megapixel video sensor (CMOS 1/2.5")
- HD Video (720p)
- WideAngle lens, 130⁰ viewing angle
- H.264 video codec
- Picture To Email
- Auto White Balance
- Auto Gain Control
- Digital PTZ (x2), Motion Triggering
- Sharpening filter
- Interpolation filter
- MJPEG/HTTP or H264/RTSP to 3rd party VMS
- 802.1x authentication
- REST API

Features

- Aesthetic design in all anodized aluminum casing, or brass (ClassicLine)
- Dome: hardened optical glass with photochromic properties
- **SmartView SIP** : 1 piezo call button
- **ProLine SV SIP** : 1, 2, 4 piezo call buttons or integrated Keypad (all models incl backlight)
- **ClassicLine SV SIP**: 1, 2, 4 piezo call buttons (all models incl backlight)
- Integrated Keypad : capacitive touch with backlight, hardened glass protective cover, PIN code support, and Picture To Email
- 1 x built-in dry relay, normally opened, max 48V/60W
- Interface to external IP-Quad-Webrelay(s), 4 dry contacts, NO/NC, max 28V/3A
- SIP registered on (Hosted) IP PBX, or Peer-to-Peer to max 3 SIP extensions per button (sub-sequent ringing)
- Up to 3 pre-configured phone numbers per call button or Pre-set (KP)
- Video Recording (storage on local SD-card)

Features – Events / Actions Matrix

Source

- Audio (VOX) detection
- Button pressed (1,2,4 and KP)
- Call (triggers when an outgoing call is setup)
- DTMF received
- HTTP call received
- Motion detection (*)
- Correct PIN code received (**)
- Ring, triggers during ringing call state (incoming or outgoing)

Action


- Beep
- Call (setup outgoing call)
- HTTP call – two URLs, invoked on Source becoming active, and inactive.
- Mailjpeg (Picture-To-Email) (*)
- Playback audio file
- Start Video Recording (*)
- Switch1 (internal relay)
- Webrelay (external IP-Webrelay)

(*) available on SmartView SIP, ProLine SIP, ClassicLine SIP with 5 MP IP camera


(**) available on all SIP intercoms with integrated Keypad

Deployment Options (1)


Peer-to-Peer

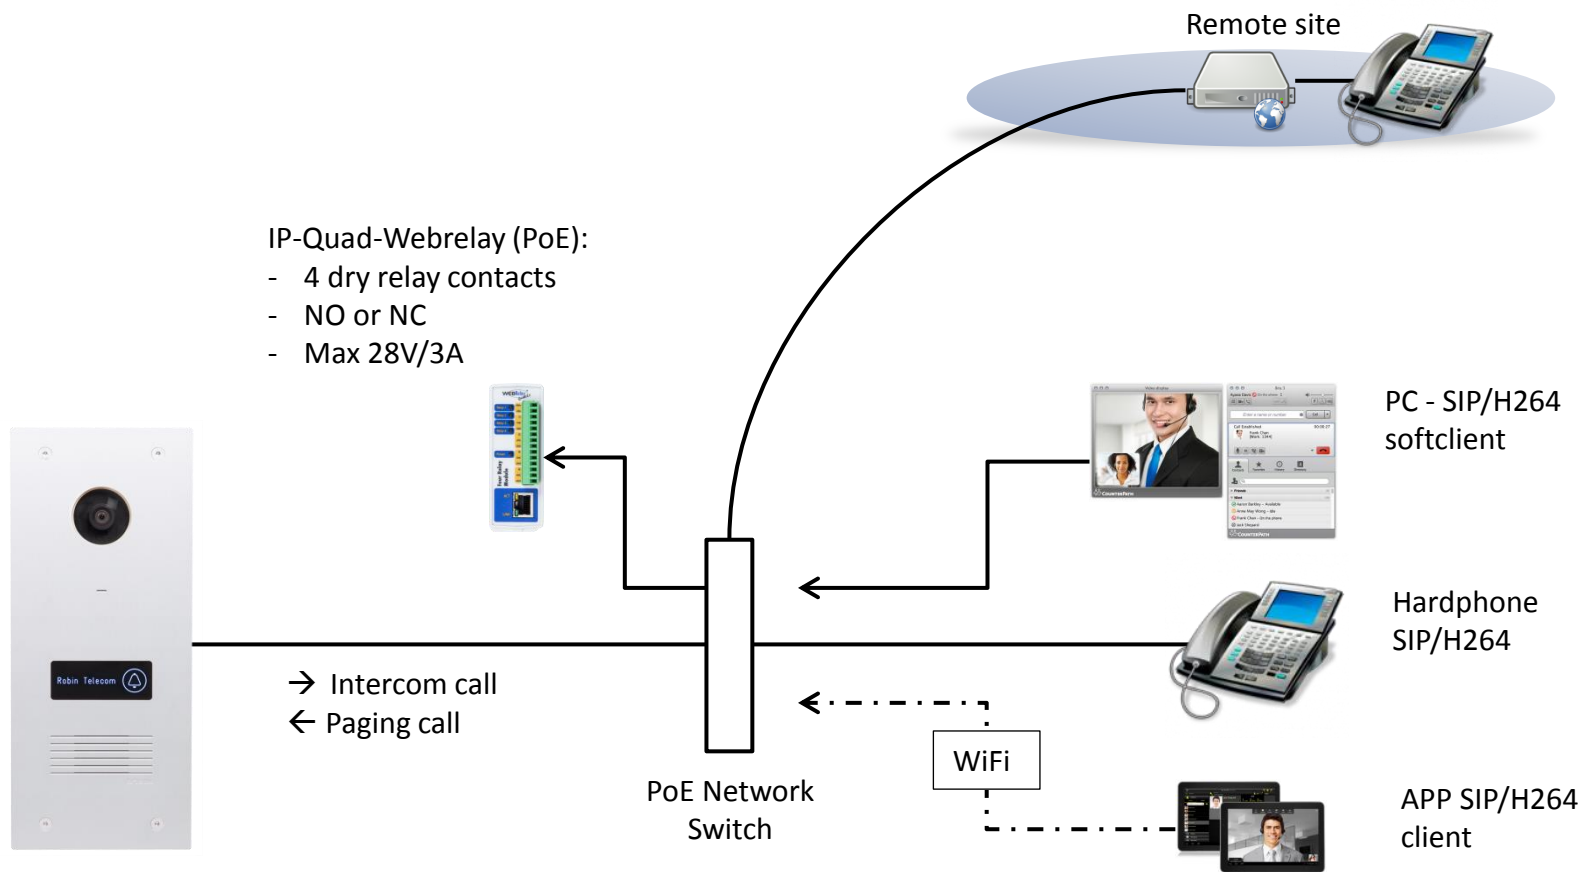

Registered on local IP-PBX

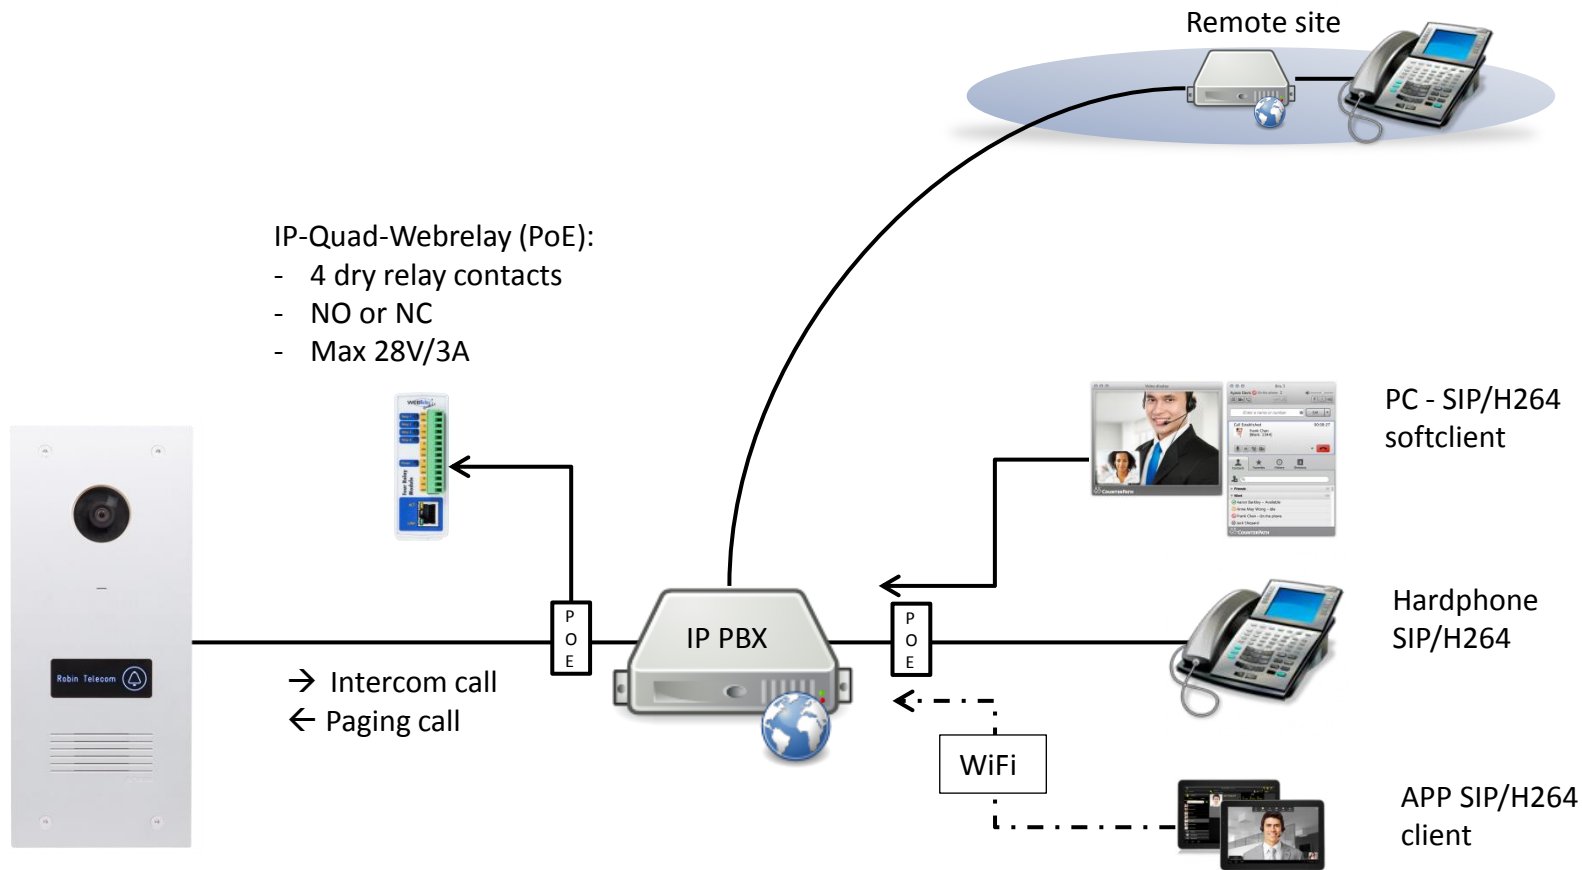

Registered on Hosted IP-PBX

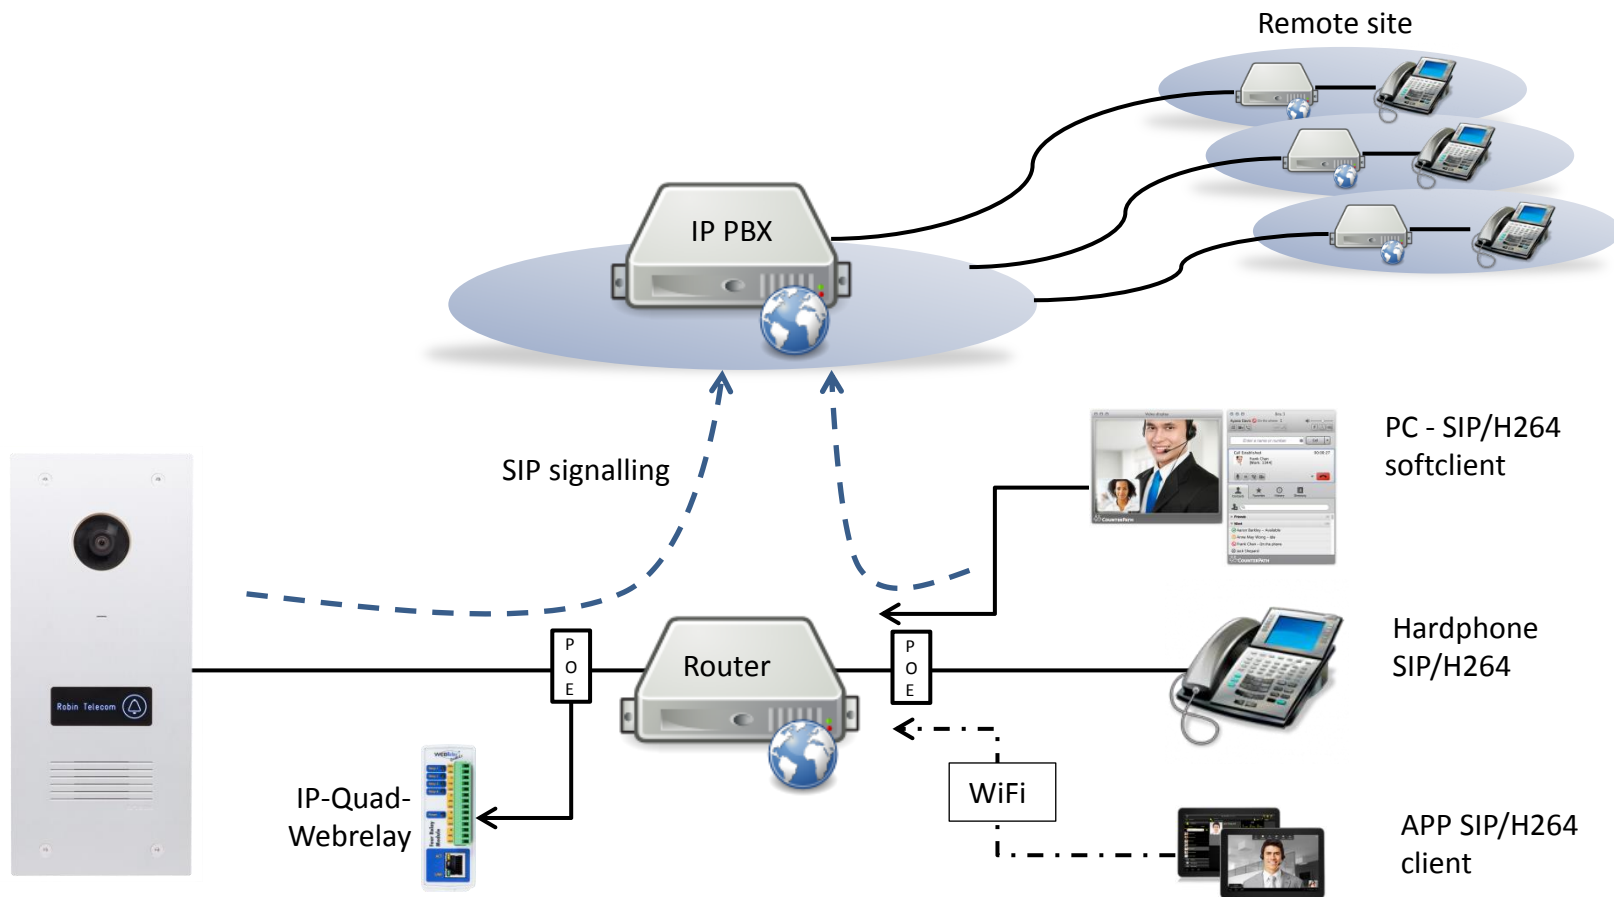

Datasheet (1)

| | |
|-------------------|---|
| Front panel | SmartView/ProLine: Anodized aluminum (3 mm) ClassicLine: brass (3mm) |
| Surface mount box | SmartView/ProLine: Anodized aluminum (3 mm) ClassicLine: n/a |
| Flush mount box | Brass plated |
| Call buttons | SmartView: 1 ProLine: 1, 2, 4, integrated Keypad ClassicLine: 1, 2, 4 |
| Keypad | Capacitive touch with backlight, hardened glass protective cover |
| Video sensor | 5 MP CMOS 1/2.5" |
| Resolution | HD 720p |
| Viewing Angle | 130-degree WideAngle |
| Protocols | DHCP, DNS, HTTP, NTP, RTP, RTSP, SIP, TCP, UDP, 802.1x, DNS-SRV |

Datasheet (2)

| | | |
|-------------------------------|---|---------------------------------------|
| IP PBX connectivity | Refer to Compatibility Sheet | |
| Connector | 10 pole industrial connector (Ethernet, dry relay) | |
| Ingress Protection | IP53 (incl surface- or flush-mount box) | |
| Operating conditions | -25° C ... +60° C | |
| Dimensions (b) x (h) x (d) | 1 button | 110 x 180 x 47 (SmartView) |
| | 1 button | 110 x 257 x 45 (ProLine, ClassicLine) |
| | 2 buttons | 110 x 257 x 45 (ProLine, ClassicLine) |
| | 4 buttons | 110 x 257 x 45 (ProLine, ClassicLine) |
| | Keypad | 110 x 257 x 45 (ProLine) |
| Weight | 500 gr (SmartView SIP), 650 gr (ProLine/ClassicLine) Flush-mount box: 450 resp 575 gr Surface mount box: 760 resp 1000 gr | |
| Power supply | IEEE 802.3af | |

Documentation

- Documentation available in Dutch and English.
- Products shipped with USB stick incl Documentation and Discovery Tool.
- All manuals are available for download via Support website:
<http://support.robin.nl> (knowledge base)
 - Installation and Operations Manual
 - Release Notes
 - Compatibility Sheet
 - REST API
 - Tech docs / How-To docs
 - Discovery Tool

■ Warranty:

- SmartView SIP : **24 months** carry-in (for products shipped as of 1.1.2017)
- ProLine/ClassicLine: **48 months** carry-in (for products shipped as of 1.5.2018)

■ Return Merchandise Authorization (RMA) procedure:

- Register RMA at: www.robintele.com/en/support.html
- Minimum info required: part-number, serial-number, software release, problem description.
- Support desk assigns RMA#
- Do not return equipment prior to consulting our Support desk, or without RMA#.

■ Support desk:

- Monday to Friday, 08:30 – 17:00 CET
- (E) support@robin.nl
- (W) <http://support.robin.nl>
- (T) +31 72 534 64 26

Where to buy

- We do not sell our products to end users, only through indirect sales channels.
- Indirect Channel Partners are listed on our website.
- No Reseller assigned in your country, or interested to become a Reseller ?
 - Contact us at sales@robin.nl or +31 72 534 64 26

Robin Telecom Development

Otterkoog 14 J
1822 BW Alkmaar
(T) +31 72 534 64 26
(F) +31 72 534 64 03
www.robintele.com
sales@robin.nl

KVK: 37148938
BTW: NL820481257B01

