



Video Pro Classic 1

Robin Pro Classic SIP Video Intercom



- 3x HDR 1080p streams at 30fps
- 1x touch-sensitive call button
- High-end brass with aged finish
- Ideal for historical buildings
- Power-over-Ethernet (PoE)
- Built-in relay



Product Description

The Robin Video Pro Classic is a high-end IP video intercom delivering reliable, high-quality communication for both residential and professional environments. Its solid brass evolves naturally over time, creating a unique character and timeless presence for historical and classical architecture and heritage-style entrances.

Built on open SIP standards, the intercom integrates seamlessly with PBX systems and supports Secure SIP where available, enabling secure and flexible deployment and advanced communication without compromising architectural identity. Designed for usability and customisation, it features engravable push buttons with adjustable LED intensity and programmable feedback sounds, allowing tailored visual & audible responses for enhanced interaction.

For visual monitoring, it delivers 1080p progressive video, providing smooth motion and sharp image quality for clear identification and interaction. The 13 MP camera is protected by a hardened optical glass dome, ensuring durability and long term performance in variable lighting conditions.

Also Available in This Range



Video Pro Classic 1

F0414000009

Robin 1-Button Pro SIP Video Intercom



Video Pro Classic 2

F0414000010

Robin 2-Button Pro SIP Video Intercom



Video Pro Classic 4

F0414000011

Robin 4-Button Pro SIP Video Intercom



Video Pro Classic Keypad

F0414000012

Robin Digital Keypad Pro SIP Video Intercom



Technical Specifications

Mechanical

| | |
|-------------------|---------------------------|
| Material | Brass with engravable tag |
| Humidity | 5-95% non-condensing (RH) |
| Weight | 1280g |
| IP Rating | IP54 |
| Dimensions | 257 x 110 x 42 mm |

Interface

| | |
|-----------------------|--|
| LAN | 10/100BASE-TX with push-in terminal block at intercom-side |
| Cable Type | Cat5e or above |
| Passive Switch | NO/NC-contact, up to 24V / 0.75A (18W) |

Signalling Protocols

| | |
|---------------------|---------------|
| SIP | UDP, TCP, TLS |
| Secure SIP | Yes |
| Integrations | API |

Camera

| | |
|--------------------------|------------------------------|
| Pixel Array | 13 MP |
| Max Viewing Angle | 120° (vertical & horizontal) |
| HDR | Yes |
| Illuminance | < 0.1 lux |

Mobile Applications

| | |
|--------------------------|-----------------------------|
| Android & iOS | Native PBX, Microsoft Teams |
| Web Interface | HTTP, HTTPS |
| SSL | Yes |
| CSR | Yes |

Accessories




Pro SB
Robin Pro surface mounting box



Pro FB
Robin Pro in-wall mounting box

Proline Label 1V
Replacement label for Video Pro 1

Webrelay
IP-Quad Webrelay (PoE)

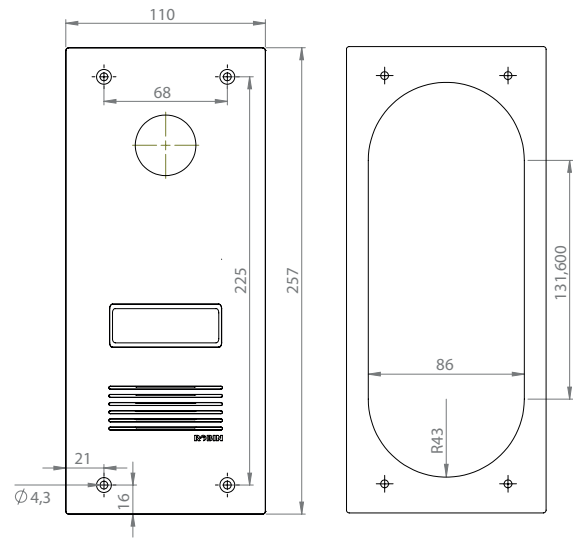

Audio

| | |
|-------------------|-------------------------|
| Microphone | Omni-directional |
| Speaker | Integrated |
| Frequency | 180-17000Hz |
| Output | 2 WRMS |
| SPL | 84dB (1W/1m) |
| Codecs | uLaw, aLaw, G.722, OPUS |
| Protocol | RTP/SRTP |

Video

| | |
|-------------------|--------------------|
| Protocol | RTP/RTSP/HTTP |
| Codecs | H264, MJPEG |
| Resolution | 1920 x 1080p |
| Frame Rate | 30fps (per stream) |
| Streams | 3 (simultaneous) |

Electrical

| | |
|---------------------|-------------------------|
| Power Supply | PoE IEEE802.3af - 15.4W |
|---------------------|-------------------------|

All the information contained within this document (pictures, drawings, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. 03/03/26 CDVI_Video Pro Classic_1_DS_02_EN_FR_A4_C