




## Video Pro Classic 2

### Robin Pro Classic SIP Video Intercom



- 3x HDR 1080p streams at 30fps
- 2x touch-sensitive call buttons
- High-end brass with aged finish
- Ideal for historical buildings
- Power-over-Ethernet (PoE)
- Built-in relay



## Product Description

The Robin Video Pro Classic is a high-end IP video intercom delivering reliable, high-quality communication for both residential and professional environments. Its solid brass evolves naturally over time, creating a unique character and timeless presence for historical and classical architecture and heritage-style entrances.

Built on open SIP standards, the intercom integrates seamlessly with PBX systems and supports Secure SIP where available, enabling secure and flexible deployment and advanced communication without compromising architectural identity. Designed for usability and customisation, it features engravable push buttons with adjustable LED intensity and programmable feedback sounds, allowing tailored visual & audible responses for enhanced interaction.

For visual monitoring, it delivers 1080p progressive video, providing smooth motion and sharp image quality for clear identification and interaction. The 13 MP camera is protected by a hardened optical glass dome, ensuring durability and long term performance in variable lighting conditions.

## Also Available in This Range



### Video Pro Classic 1

F0414000009

Robin 1-Button Pro SIP Video Intercom



### Video Pro Classic 2

F0414000010

Robin 2-Button Pro SIP Video Intercom



### Video Pro Classic 4

F0414000011

Robin 4-Button Pro SIP Video Intercom



### Video Pro Classic Keypad

F0414000012

Robin Digital Keypad Pro SIP Video Intercom



# Technical Specifications

## Mechanical

<b>Material</b>	Brass with engravable tag
<b>Humidity</b>	5-95% non-condensing (RH)
<b>Weight</b>	1280g
<b>IP Rating</b>	IP54
<b>Dimensions</b>	257 x 110 x 42 mm

## Interface

<b>LAN</b>	10/100BASE-TX with push-in terminal block at intercom-side
<b>Cable Type</b>	Cat5e or above
<b>Passive Switch</b>	NO/NC-contact, up to 24V / 0.75A (18W)

## Signaling Protocols

<b>SIP</b>	UDP, TCP, TLS
<b>Secure SIP</b>	Yes
<b>Integrations</b>	API

## Camera

<b>Pixel Array</b>	13 MP
<b>Max Viewing Angle</b>	120° (vertical & horizontal)
<b>HDR</b>	Yes
<b>Illuminance</b>	< 0.1 lux

## Mobile Applications

<b>Android &amp; iOS</b>	Native PBX, Teams application
<b>Web Interface</b>	HTTP, HTTPS
<b>SSL Certificate</b>	Yes
<b>CSR</b>	Yes

## Accessories




**Pro SB**  
Robin Pro surface mounting box



**Pro FB**  
Robin Pro in-wall mounting box

**Proline Label 2V/4V**  
Replacement label for Video Pro 2/4

**Webrelay**  
IP-Quad Webrelay (PoE)

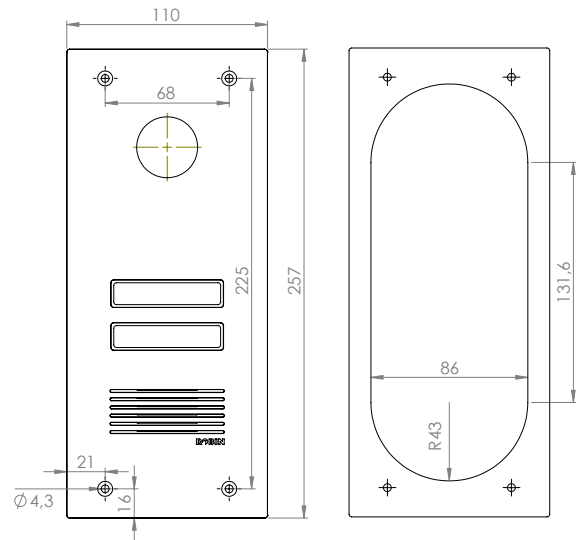

## Audio

<b>Microphone</b>	Omni-directional
<b>Speaker</b>	Integrated
<b>Frequency</b>	180-17000Hz
<b>Output</b>	2 WRMS
<b>SPL</b>	84dB (1W/1m)
<b>Codecs</b>	uLaw, aLaw, G.722, OPUS
<b>Protocol</b>	RTP/SRTP

## Video

<b>Protocol</b>	RTP/RTSP/HTTP
<b>Codecs</b>	H264, MJPEG
<b>Resolution</b>	1920 x 1080p
<b>Frame Rate</b>	30fps (per stream)
<b>Streams</b>	3 (simultaneous)

## Electrical

<b>Power Supply</b>	PoE IEEE802.3af - 15.4W
---------------------	-------------------------

All the information contained within this document (pictures, drawings, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. 03/03/26 CDVI\_Video Pro Classic 2\_DS\_02\_EN-FR\_A4\_C